
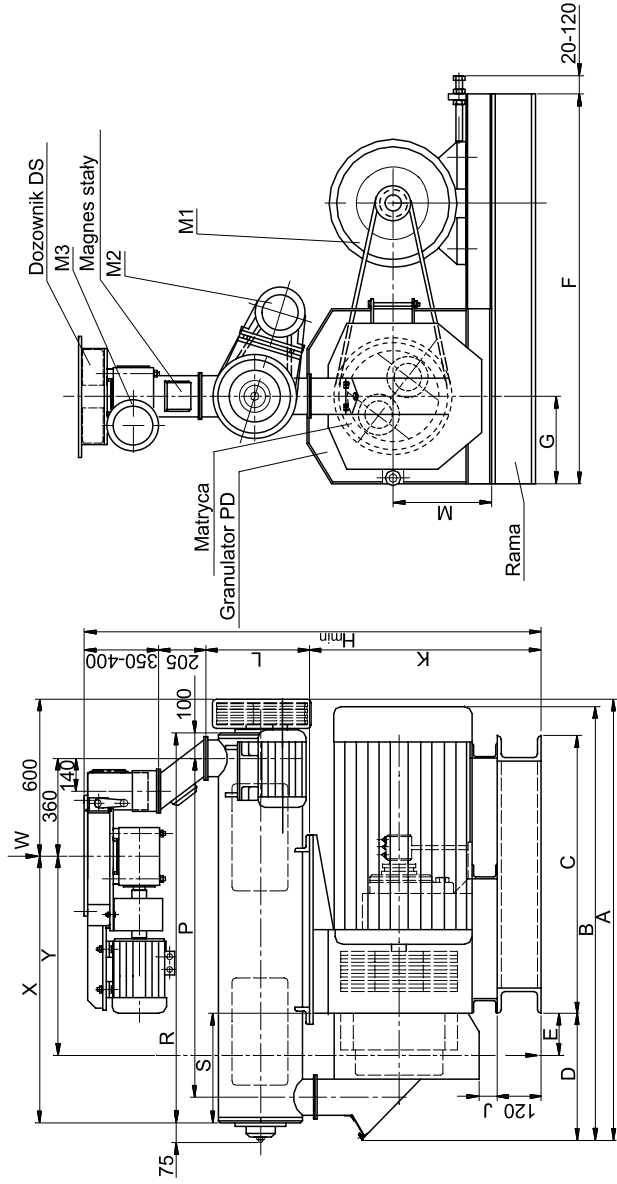


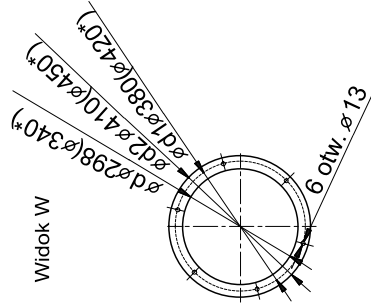

*-typ PD-7

Typ	Średnica wew. matrycy [mm]	Wydajność dla granul o średnicy Ø4,8[mm] [t/h]	Moce silników [kW]			Masa: granulatora kondycjonera dozownika całkowita [kg]	Wymiary [mm]																	
	Szerokość robocza matrycy [mm]		M1	M2	M3		A	B	C	D	E	F	G	H	J	K	L	M	P	R	S	X	Y	
PD-0,5	Ø220	do 0,5	7,5	1,1	2,2	347 135 185 667	1210	1040	750	310	100	1000	1960	620	2235	50	1160	520	720	1800	2030	530	1570	1090
	50						1350	1090	900	350	120	1250	520	1615	120	610	370	420	780	940	280	480	500	300
PD-1	Ø250	0,4 – 1,2	15	2,2	2,2	492 160 185 837	1350	1090	900	350	120	1250	1580	460	1885	90	930	400	445	1180	1360	380	900	675
	65						1580	1580	900	460	155	1580	1740	520	1675	1675	1675	1675	1675	1675	1675	1675	1675	1675
PD-3	Ø305	2,0 – 2,5	37 (30)	4,0	2,2	1240 250 185 1675	1580	1580	900	460	155	1580	1740	520	1990	60	995	440	487	1430	1620	420	1160	905
	100						1675	1580	900	520	165	1740	520	1990	60	995	440	487	1430	1620	420	1160	905	905
PD-5	Ø360	4,0 – 4,5	55 (45)	5,5	3,0	1600 275 205 2080	1860	1740	1000	520	165	1740	1740	520	1990	60	995	440	487	1430	1620	420	1160	905
	100						2080	1740	1000	520	165	1740	1740	520	1990	60	995	440	487	1430	1620	420	1160	905
PD-7	Ø420	6,0 – 6,5	75	7,5	4,0	2400 365 225 2990	2240	1750	1500	600	160	1960	1960	620	2235	50	1160	520	720	1800	2030	530	1570	1090
	130						2990	1750	1500	600	160	1960	1960	620	2235	50	1160	520	720	1800	2030	530	1570	1090